


Pro Convert for NDI® to HDMI 4K Module Technical Specifications

Decoding module for rack-mounted centralized deployment, converting a live IP stream into 4K HDMI signal

SKU: B41100000

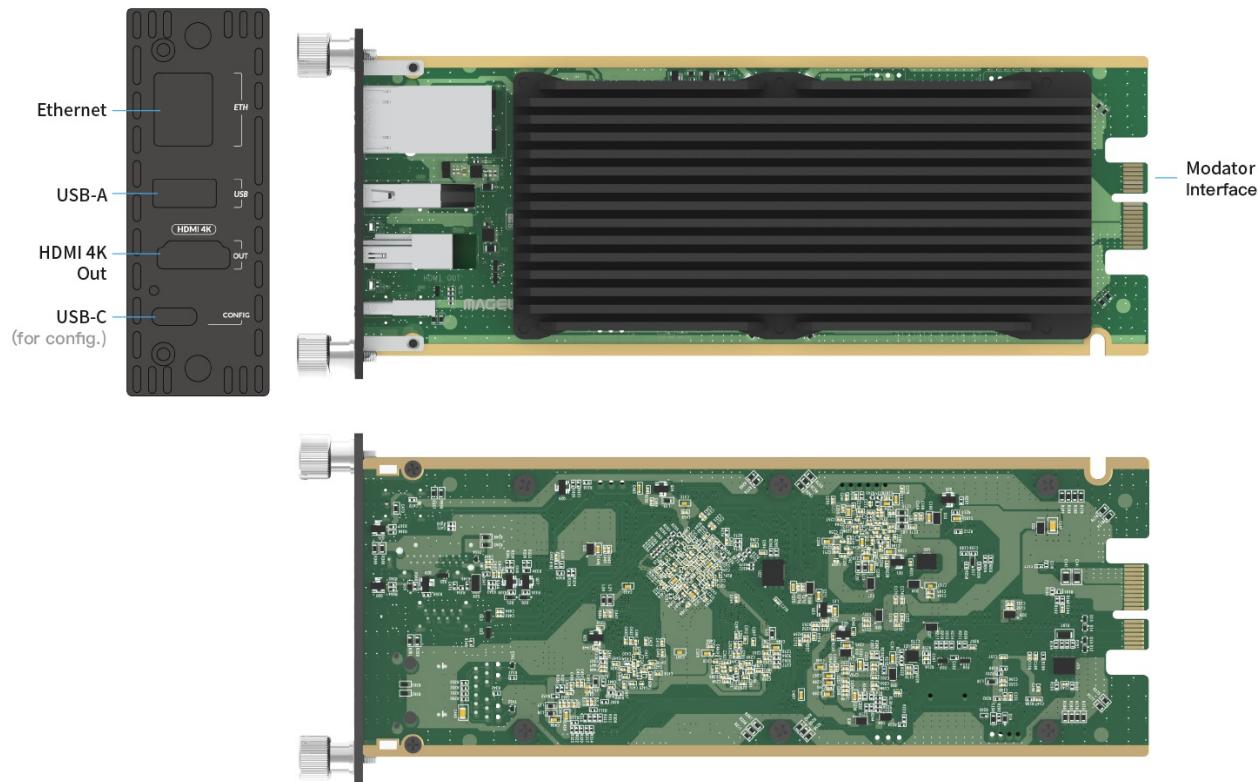

Product Overview

Pro Convert for NDI® to HDMI 4K Module is a hot-swappable module to be installed in the Magewell Modator chassis. It is capable of decoding IP streams up to 4Kp60 in a wide range of formats (including NDI® High Bandwidth, NDI® HX2, NDI® HX3, TVU ISSP, RTMP, RTSP, HLS, MPEG-TS and more) into HDMI output, which provides a higher-density product form factor and a scalable solution for IP-based production and distribution deployments.

Key Features

- Supports for up to 4096x2160 60fps HDMI output
- Supports 96KHz, 16-bit 8-channel audio output
- Decode up to 4Kp60 NDI® streams as well as additional protocols including RTSP, HTTP, HLS, RTMP Pull/Push and MPEG-TS over UDP/SRT/RTP and TVU ISSP
- Discover NDI® devices across network segments
- Supports NDI® 6.2
- Image flip for inverted projector installations and safe area controls
- Automatic output optimization for target display with integrated up/down conversion
- Configure through the touch screen of Magewell Modator chassis, Web GUI or Control Hub

Technical Specifications

Revised on 01/29/2026

Interfaces

- 1* RJ45 1000Mbps Ethernet port
- 1* USB Type-C port for configuration
- 1* USB Type-A 3.0 port for connecting peripherals
- 1* HDMI 2.0 output port
- 1* Modulator interface for connecting to Modulator 2U (hot-swappable)

Decoding Features

- Decoding up to 4Kp60 streams of NDI High Bandwidth, NDI HX, NDI HX2, NDI HX3, RTSP, HTTP, HLS, RTMP Pull/Push, MPEG-TS over UDP/SRT/RTP and TVU ISSP protocols
- SpeedHQ/H.264/H.265 video decoders
- AAC/MP3 audio decoders
- Supports NDI 6.2

Output Features

- Max output: 4096x2160 60fps 4:4:4 8-bit
- Delivering video at the preferred video format according to the EDID of the connected monitor. Supported output formats include:
 - 4096x2160p/3840x2160p 23.98/24/25/29.97/30/50/59.94/60
 - 2560x1440p 60/100/120/144
 - 2560x1080p 23.98/24/25/29.97/30/50/59.94/60
 - 1920x1080p 23.98/24/25/29.97/30/50/59.94/60/100/119.88/120
 - 1920x1080i 50/59.94/60
 - 1280x720p 23.98/24/25/29.97/30/50/59.94/60
 - 720x576p50
 - 720x576i50
 - 720x480p59.94/60
 - 720x480i59.94/60
- Supports 96KHz 16bits 8-channel audio output

Web UI

- Register with Magewell Control Hub for remote centralized management
- Supports configuring and managing via Web UI
- Provides comprehensive information regarding the device and decoded signals in real-time
- Allow to configure how a signal is decoded and output, including OSD settings, deinterlacing, resolutions, alpha blending, audio gain, sample rate, and channel mapping, as well as the network connection
- Supports updating firmware
- Supports USB NET
- Supports Microsoft Edge/Firefox/Chrome/Safari/Opera web browsers
- Provides HTTP APIs

LED Indicators

- Decode LED status indicator
 - On: decoding
 - Blinks: decoding error
 - Off: source unselected

Physical Specifications

- Form factor: 184.4mm (L) x 30.0mm (W) x 81.5mm (H)
- Weight: ≈316g

Power Consumption

- Max power consumption: 9.85w

Working Environment

- Operating temperature: 0 to 50 deg C
- Storage temperature: -20 to 70 deg C
- Relative humidity: 5% to 90% non-condensing

Notice

Copyright (c) 2011–2026 [Nanjing Magewell Electronics Co., Ltd.](#) All rights reserved.

Specifications are based on current hardware, firmware and software revisions, and are subject to change without notice.

“MAGEWELL” is registered trademark by Magewell. All other trademarks are the property of their respective holders.