


Pro Convert for NDI® to HDMI 4K Module Technical Specifications

Decoding module for rack-mounted centralized deployment, converting a live IP stream into 4K HDMI signal

SKU: B41100000

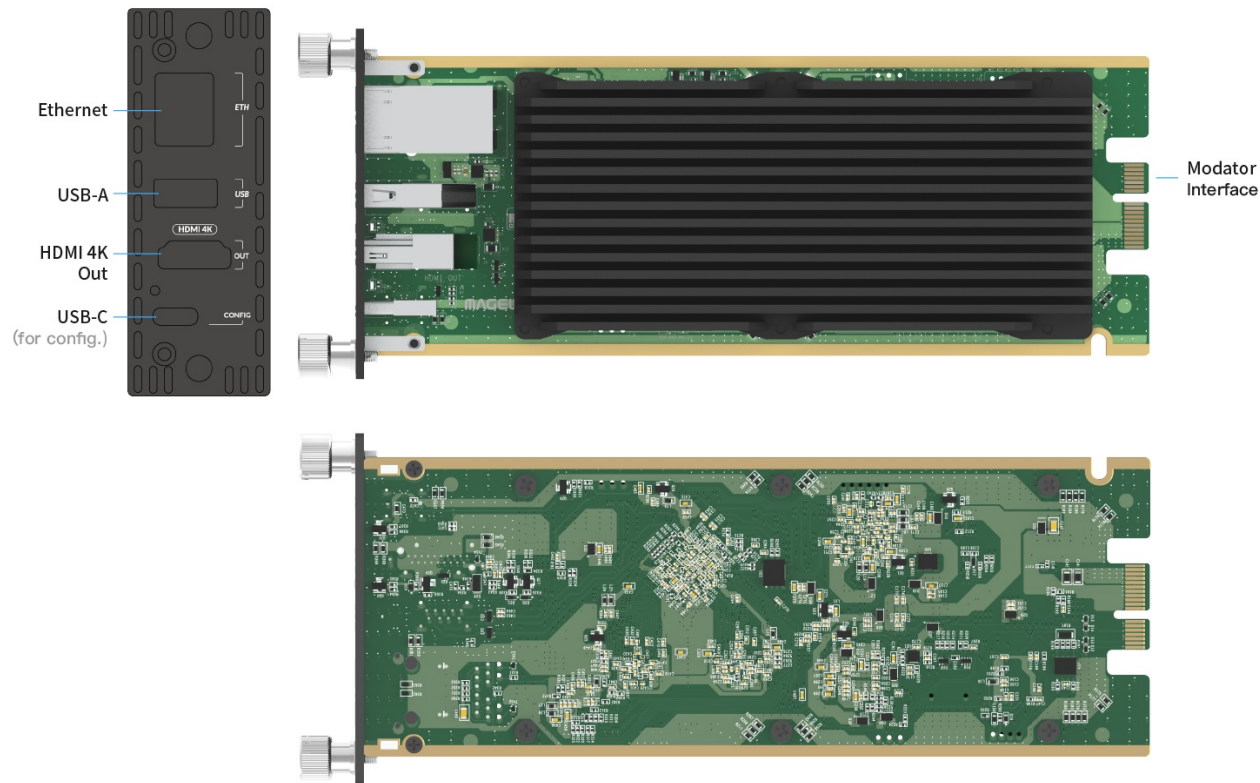

Product Overview

Pro Convert for NDI® to HDMI 4K Module is a hot-swappable module to be installed in the Magewell Modator chassis. It is capable of decoding IP streams up to 4Kp60 in a wide range of formats (including NDI® High Bandwidth, NDI® HX2, NDI® HX3, TVU ISSP, and H.264 or H.265 delivered via RTMP, RTSP, HLS, MPEG-TS and more) into HDMI output, which provides a higher-density product form factor and a scalable solution for IP-based production and distribution deployments.

Key Features

- Supports for up to 4096x2160 60fps HDMI output
- Supports 96KHz, 16-bit 8-channel audio output
- Decode up to 4Kp60 NDI® streams and H.264/H.265 streams in additional protocols including RTSP, HTTP, HLS, RTMP Pull/Push and MPEG-TS over UDP/SRT/RTP and TVU ISSP
- Discover NDI® devices across network segments
- Supports NDI® 5.x
- Image flip for inverted projector installations and safe area controls
- Automatic output optimization for target display with integrated up/down conversion
- Configure through the touch screen of Magewell Modator chassis, Web GUI or Control Hub

Technical Specifications

Revised on 25/04/2025

Interfaces

- 1* RJ45 1000Mbps Ethernet port
- 1* USB Type-C port for configuration
- 1* USB Type-A 3.0 port for connecting peripherals
- 1* HDMI 2.0 output port
- 1* Modator interface for connecting to Modator 2U (hot-swappable)

Decoding Features

- Decoding up to 4Kp60 streams of NDI High Bandwidth, NDI HX, NDI HX2, NDI HX3, RTSP, HTTP, HLS, RTMP Pull/Push, MPEG-TS over UDP/SRT/RTP and TVU ISSP protocols
- H.264/H.265 video decoders
- AAC/MP3 audio decoders
- Supports NDI 5.x

Output Features

- Max output: 4096x2160 60fps 4:4:4 8-bit
- Delivering video at the preferred video format according to the EDID of the connected monitor. Supported output formats include:
 - 4096x2160p/3840x2160p 23.98/24/25/29.97/30/50/59.94/60
 - 2560x1440p 60/100/120/144
 - 2560x1080p 23.98/24/25/29.97/30/50/59.94/60
 - 1920x1080p 23.98/24/25/29.97/30/50/59.94/60/100/119.88/120
 - 1920x1080i 50/59.94/60
 - 1280x720p 23.98/24/25/29.97/30/50/59.94/60
 - 720x576p50
 - 720x576i50
 - 720x480p59.94/60
 - 720x480i59.94/60
- Supports 96KHz 16bits 8-channel audio output

Web UI

- Register with Magewell Control Hub for remote centralized management
- Supports configuring and managing via Web UI
- Provides comprehensive information regarding the device and decoded signals in real-time
- Allow to configure how a signal is decoded and output, including OSD settings, deinterlacing, resolutions, alpha blending, audio gain, sample rate, and channel mapping, as well as the network connection
- Supports updating firmware
- Supports USB NET
- Supports Microsoft Edge/Firefox/Chrome/Safari/Opera web browsers
- Provides HTTP APIs

LED Indicators

- Decode LED status indicator
 - On: decoding
 - Blinks: decoding error
 - Off: source unselected

Physical Specifications

- Form factor: 184.4mm (L) x 30.0mm (W) x 81.5mm (H)
- Weight: ≈316g

Power Consumption

- Max power consumption: 9.85w

Working Environment

- Operating temperature: 0 to 50 deg C
- Storage temperature: -20 to 70 deg C
- Relative humidity: 5% to 90% non-condensing

Notice

Copyright (c) 2011–2025 [Nanjing Magewell Electronics Co., Ltd.](#) All rights reserved.

Specifications are based on current hardware, firmware and software revisions, and are subject to change without notice.

HDMI, the HDMI logo and High-Definition Multimedia interface are trademarks or registered trademarks of HDMI Licensing LLC. NDI[®] is trademark or registered trademark of Vizrt NDI AB.